

### LITHIUM IRON PHOSPHATE BATTERY

#### ELECTRICAL SPECIFICATION

Nominal Voltage	12V (12.8V)
Nominal Capacity	5AH
Capacity @0.2C	5HR
Energy	64WH
Resistance	≤ 200m Ω
Efficiency	99%
Self Discharge	< 3% per month

#### DISCHARGE SPECIFICATIONS


Max. Cont. Discharge	5A
Peak Discharge Current	10A (3 seconds)
Recommend Cut-off Voltage	10V
BMS Discharge cut off	9.2V
Short Circuit Protection	200-600 μs

#### CHARGE SPECIFICATION

Recommended Charge Current	1-2A
Max. Charge Current	5A
BMS Charge Voltage Cut-off	14.6V (1±0.2S)
Reconnect Voltage	14.2V-14.6V
Balancing Current	20mA
Balancing Voltage	3.5V
Charge Current (-20 °C to-10 °C)	≤ 0.05C

#### FEATURE & BENEFITS

- High Cycle Life : >2000 times @80%DOD for Effectively lower cost of ownership
- Built-in BMS Protection: Battery Management System are incorporated to protect battery from OVER CHARGING, OVER DISCHARGING , SHORT CIRCUIT
- LIGHT WEIGHT: Dry power lithium batteries has higher energy density, wh/kg also being up to 1/3 of SLA battery
- WIDE OPERATING TEMPERATURE RANGE: Suitable for users in a wider range of application where ambient temperature is unusually high: up to +60° C
- STEADY OUTPUT VOLTAGE, VIBRATION &SHOCK RESISTANT, NO MEMORY EFFECT, PRESSURE RESISTANT CELLS

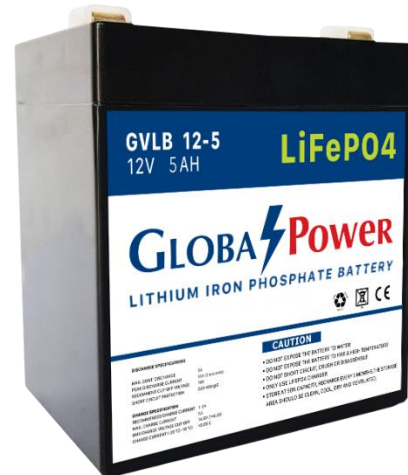

#### MECHANICAL SPECIFICATIONS

Dimensions (L*W*H)	95*65*99mm
Weight	0.8KG
Terminal Type	F2 Terminal
Case Material	ABS
Cell Type	Cylinder cell- LifePO4





#### TEMPERATURE SPECIFICATION

Discharge Temperature	-20 °C to 60 °C
Charge Temperature	0 °C to 45 °C
Storage Temperature	-20 °C to 40 °C
BMS High Temperature	80 °C
Reconnect Temperature	50 °C

#### OTHER CUSTOMISE SERVICE

CHARGE/DISCHARGE CURRENT, BATTERIES SIZE,OEM

## PERFORMANCE CHARACTERISTIC

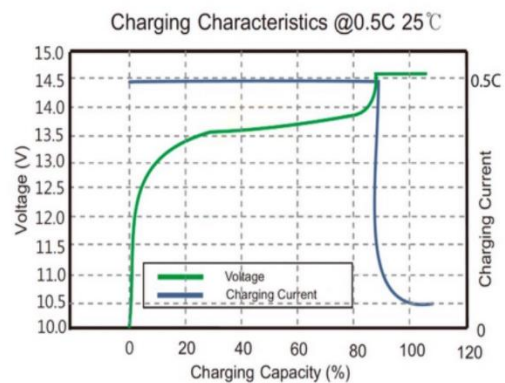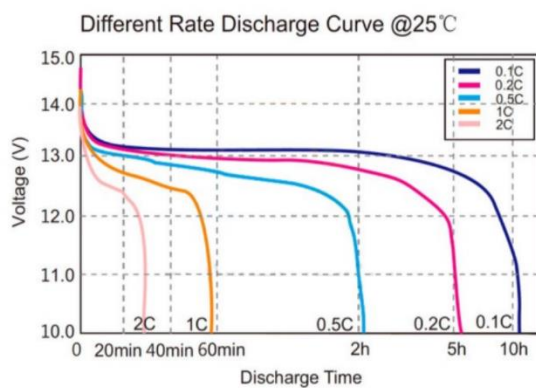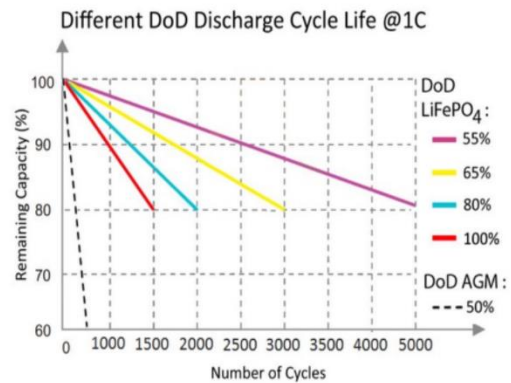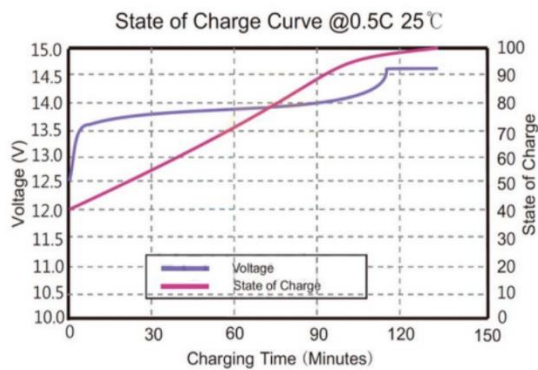

## SUITABLE APPLICATIONS

- Lithium Iron Phosphate can be used in any application that would normally use Lead Acid, GEL, or AGM type batteries.
- LiFePO4 in 4S=12.8V and 8S=25.6V is closed to Lead Acid equivalents of the Lithium rechargeable types
- Suitable applications included caravan, marine, golf carts, solar storage, remote monitoring, switching applications

## CAUTIONS

- Do NOT expose the battery to water
- Do NOT expose the battery to fire & high temperature
- Do NOT short circuit, crush, or disassemble
- Only use LiFePO4 charger
- Store at 50% capacity, recharge every 3 months. The storage area should be clean, cool, dry and ventilated.