

### LITHIUM IRON PHOSPHATE BATTERY



#### ELECTRICAL SPECIFICATION

Nominal Voltage	51.2V
Nominal Capacity	100AH
Capacity @20A	5HR
Energy	5120WH
Resistance	≤ 20m Ω
Efficiency	99%
Self Discharge	< 3% per month

#### DISCHARGE SPECIFICATIONS

Max. Cont. Discharge	180A
Peak Discharge Current	200A (20ms)
Discharge Cut-off Voltage	40V

#### CHARGE SPECIFICATION

Recommended Charge Current	20A
Max. Charge Current	100A
Charge Voltage	58.4V

#### MECHANICAL SPECIFICATIONS

Dimensions (L*W*H)	375*351*258mm
Weight	43 KG
Terminal Type	M8 Screw
Case Material	Metal case
Enclosure Protection	IP66
Cell Type	Prismatic







#### TEMPERATURE SPECIFICATION

Discharge Temperature	-20 °C to 60 °C
Charge Temperature	0 °C to 55 °C
Storage Temperature	-20 °C to 40 °C
BMS High Temperature	80 °C
Reconnect Temperature	50 °C
Communication	CAN/Bluetooth

#### FEATURE & BENEFITS

- High Cycle Life : >2000 times @80%DOD for Effectively lower cost of ownership
- Built-in BMS Protection: Battery Management System are incorporated to protect battery from OVER CHARGING, OVER DISCHARGING , SHORT CIRCUIT
- LIGHT WEIGHT: Dry power lithium batteries has higher energy density, wh/kg is the 3times than SLA battery.
- WIDE OPERATING TEMPERATURE RANGE: Suitable for users in a wider range of application where ambient temperature is unusually high: up to +60° C
- STEADY OUTPUT VOLTAGE, VIBRATION & SHOCK RESISTANT, NO MEMORY EFFECT, PRESSURE RESISTANT CELLS

## PERFORMANCE CHARACTERISTIC

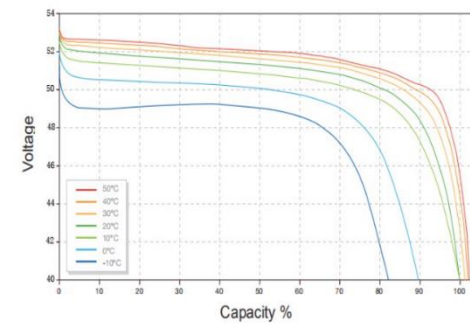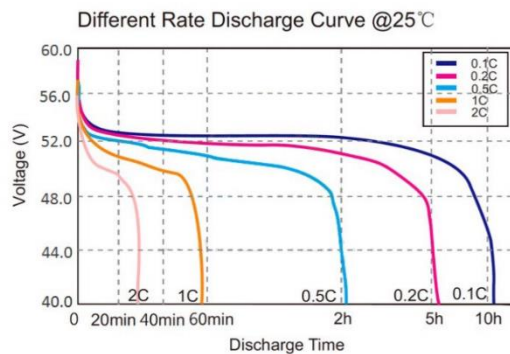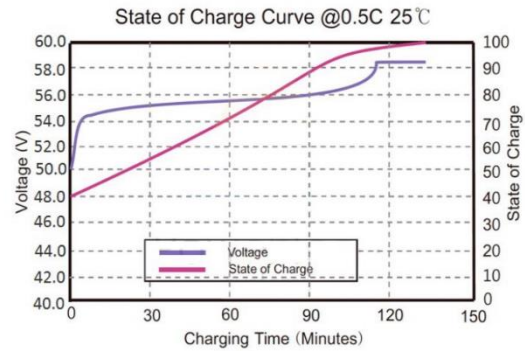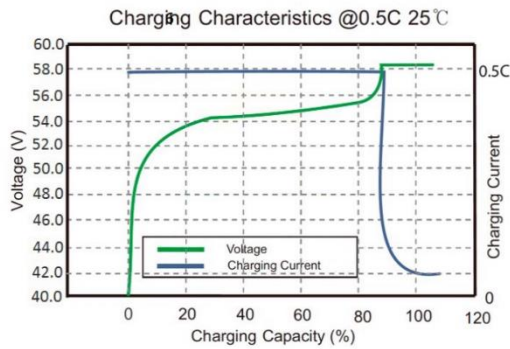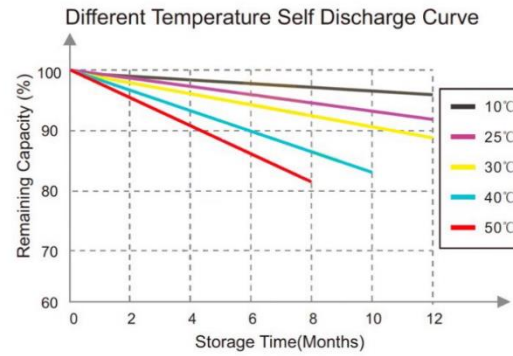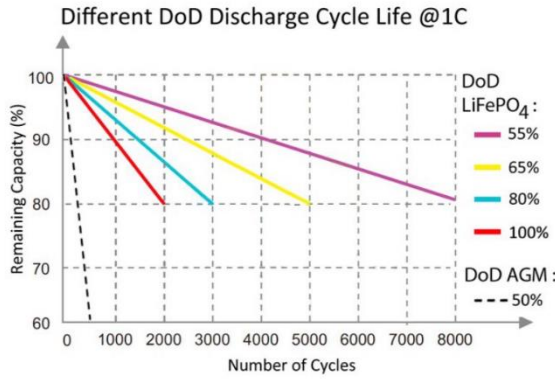

## SUITABLE APPLICATIONS

- Lithium Iron Phosphate can be used in any application that would normally use Lead Acid, GEL, or AGM type batteries.
- LiFePO4 in 4S=12.8V and 8S=25.6V is closed to Lead Acid equivalents of the Lithium rechargeable types
- Suitable applications included caravan, marine, golf carts, solar storage, remote monitoring, switching applications

## CAUTIONS

- Do NOT expose the battery to water
- Do NOT expose the battery to fire & high temperature
- Do NOT short circuit, crush, or disassemble
- Only use LiFePO4 charger
- Store at 50% capacity, recharge every 3 months. The storage area should be clean, cool, dry and ventilated.